





INDUSTRIAL PROCESS AND  
COMMERCIAL VENTILATION SYSTEMS

## HIGH EFFICIENCY PLUG FANS

MODEL BEPL

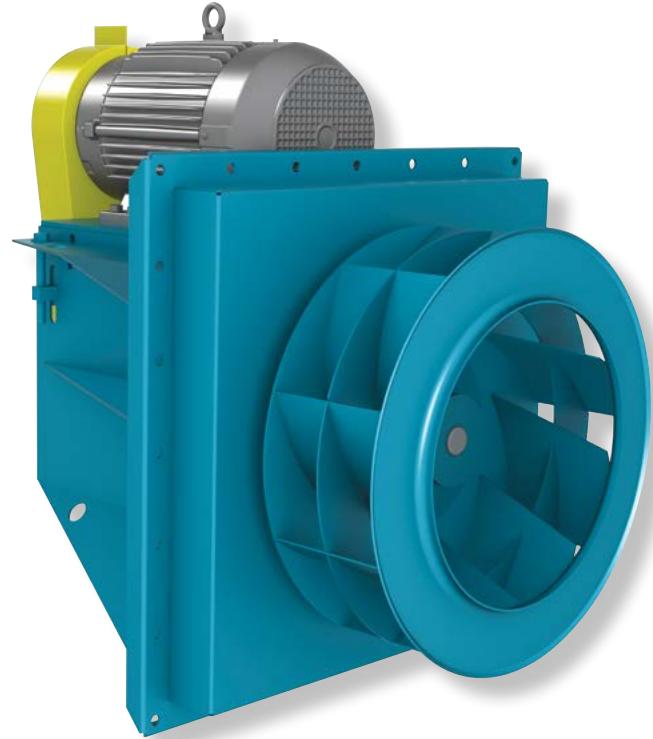

## Overview BEPL

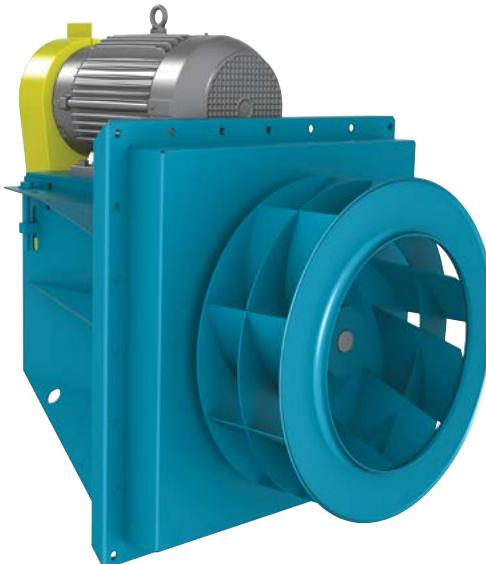

BEPL Plug Fan,  
Arrangement 9



Plug fans offer great versatility for complex system configurations. Equipped with a gusseted mounting panel, they are mounted directly to the plenum wall separating the motor and drive components from the process air. Plug fans provide high efficiency recirculation air with the benefit of easy installation and removal.

### Typical Applications Include

Air Curtains, Dyers, Freezers, High Temperature, Kilns, Ovens, Process Applications, Product Cooling, Re-Circulation, Air Heaters, Ceiling, Wall and Floor Panel Plenums, Degreasers, Dryers, Dust Collectors, Evaporators, Packaged Air Handlers, Parts Washers, Penthouses, Smoke Houses, Space Heaters, Spray Booths and other High Temperature Applications

### Impeller Types

Backward Curved

### Arrangements

Available in Arrangement 1P, 9 and 9P (Belt Driven) and Arrangement 4, 4P and 8P (Direct Drive) configurations

### Optional Construction

High Temperature, Insulated Plug, Spark Resistant, All Welded Housing, Variable Inlet Vanes, Integral Inlet Cone Assembly

### Sizes and Performance

12" to 49" impeller diameters (305 mm to 1,245 mm)  
Airflow to 76,000 CFM (129,100 m<sup>3</sup>/hour)  
Static pressure to 12" w.g. (2,980 Pa)



For complete product performance, drawings and available accessories, download our Fan Selector program at [tcf.com](http://tcf.com).

## Overview

### BEPL

BEPL plug fans from Twin City Fan & Blower are compact, versatile and offer the highest efficiency in the industry. Their versatility allows them to be used for air circulation in a variety of industrial applications including air heaters, degreasers, dryers, dust collectors, kilns, ovens, parts washers, penthouses, smoke houses, space heaters, spray booths and other high temperature applications.


Plug fans are housed in the customer's enclosure in applications where the system plenum acts as the fan housing. This configuration saves space since connecting ductwork and motor support pedestals are generally not needed. More space savings can be obtained by utilizing the impeller compartment as a pressurized chamber in lieu of a fan scroll. The use of multiple discharges from the pressurized chamber allows for additional savings by reducing ducting requirements.

BEPL plug fans feature SWSI backward curved, non-overloading, single thickness airfoil type impellers. The unique impeller design offers increased efficiency over competitor's airfoil blade designs yet can handle airstreams not conducive to traditional hollow airfoil shapes.

The plug fan's motor and drive are protected from high temperatures by the customer's chamber wall or the optional 4" or 6" insulated plug. The motor and drive are mounted to the plug panel which may be bolted or welded in place. The plug assembly may be mounted with the shaft in either the vertical or horizontal position for maximum flexibility. Horizontal construction is standard. Vertical mounting can be provided when specified. An all welded housing and an integral inlet cone are available as options.




Paint Booth Ventilation

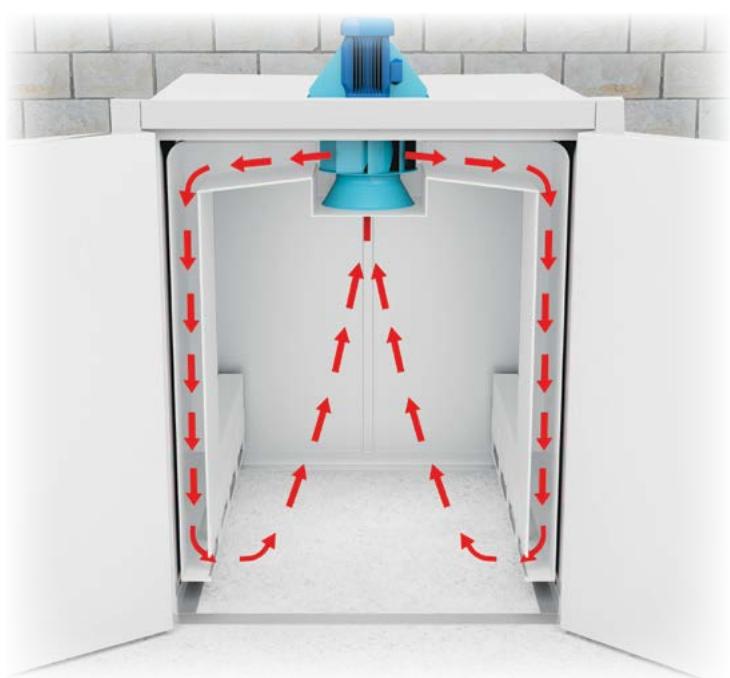

Oven Airflow

## CONSTRUCTION FEATURES

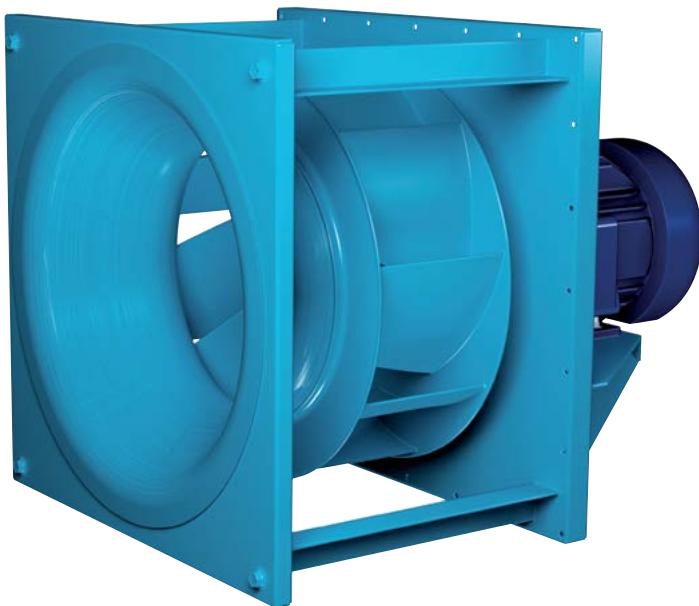

Non-Insulated,  
Arrangement 4 BEPL

### Adjustable Motor Base

The motor base is standard with leveling and tension adjustment to ensure proper drive belt alignment. The motor base is heavy-gauge steel and prepunched to accept the standard motor frame specified.

### Plug Panel

Constructed of minimum 7-gauge steel with formed flanges to maintain flatness and rigidity. Panel is prepunched for bolt mounting. Panel assembly may also be welded in place. The "cross frame" bearing support is designed for maximum stability and load spreading. Bearings are serviceable without disassembly of panel or frame.

### Plug Assembly

Available for both horizontal and vertical applications. Horizontal construction is standard. Vertical construction will be provided when specified.

### Inlet Cones

Heavy-gauge and spun to match the impeller intake rim to ensure smooth airflow. Inlet cone flange is prepunched for mounting. Inlet cones are shipped loose as standard. An integral inlet cone is optional.

### Impellers

Impellers are assembled of die-formed, matched components, welded to both back plate and rim. Impellers are statically and dynamically balanced.


### Shafts

Shafts are AISI Grade 1040 or 1045 hot-rolled steel accurately turned, ground, polished and ring-gauged for verification. Shafts are sized for a first critical speed of at least 1.43 times the maximum speed of the class.

### Bearings

Either ball or spherical roller, heavy-duty, self-aligning, pillow block type bearings are provided. Bearing selection is based on L-10 minimum life of 40,000 hours or average life of 200,000 hours. Split roller bearings are not recommended.



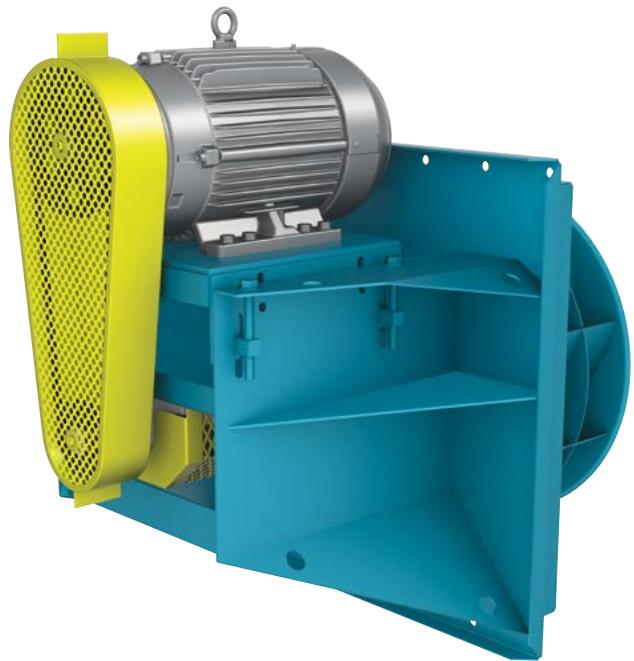

## High Temperature Construction

- 301-500°F: Includes high temperature grease, expansion and non-expansion bearings, ceramic shaft seal and shaft cooler.
- 501-800°F: Includes the modifications above with the addition of high temperature aluminum paint. Minimum 4" insulation is required and is available as an optional item from TCF. Be sure to apply derating factors for high temperature construction. See Table 7 on page 11.
- 801-1000°F: Includes the modifications above with the addition of 316 stainless steel impeller and shaft. Also includes shaft extension for the required 6" insulation. 6" insulated plug is available as an optional item. Be sure to apply stainless steel derating factors for temperature. See Table 7 on page 11.

## Insulated Plug

Protects motor and drive components from heat. An insulated plug is recommended for temperatures above 500°F. Available in 2", 4" and 6" thicknesses. Special thicknesses to match customer's insulated wall are available. Plug is assembled to mounting panel when ordered. See Table 1 on page 10 for maximum RPMs based on different thicknesses of the plug.

## Spark Resistant Construction

Fan applications may involve the handling of potentially explosive or flammable particles, fumes or vapors. Such applications require careful consideration by the system designer to ensure the safe handling of such gases. Twin City Fan & Blower offers the following classifications of spark resistant construction per AMCA Standard 99-0401-86. It is the specifier or the user's responsibility to specify the type of spark resistant construction with full recognition of the potential hazards and the degree of protection required.

Type B - BEPL impellers employ high strength steel, therefore construction in aluminum must be reviewed by the factory for availability. The maximum temperature is not to exceed 200°F. Pricing available upon application review with substantial reduction in speed.

Type C - The fan shall be so constructed that a shift of the impeller or shaft will not permit two ferrous parts of the fan to rub or strike. This is accomplished by using a mild steel inlet cone with a Monel rub ring for temperatures up to 800°F. Consult factory for construction to 1000°F.

## All-Welded Housing

Heavy-gauge steel housing is provided with impeller opening on each side and weld studs on the inlet side for cone mounting. Specify rotation and discharge as viewed from drive side to ensure proper stud placement. Housing supports and attachments for wall mounting to be provided by others. See page 19 for dimensions.

## Variable Inlet Vanes

Vane blades are cantilever design or center supported, equipped with permanently lubricated bearings and ball joints for smooth and easy operation. Vane assemblies are external type for sizes 122 through 165 and nested for sizes 182 through 490. Standard inlet vanes are applicable to 300°F. Consult factory for higher temperatures.

## Integral Inlet Cone Assembly

Includes four pieces of angle, welded to the insulated plug or mounting panel, which serve to pre-align the inlet funnel within the impeller. The entire unit can be installed or removed through the same hole in the customer's enclosure, without the need for additional mounting or alignment of the inlet cone.

### Arrangement 1P

Belt drive arrangement where the fan is mounted to grade and the motor is mounted separate from the fan. Typically used on larger fans and/or larger HP motors where the customer's wall may not be sufficient by itself. Mounting to the foundation also makes it better for meeting lower vibration requirements. Mounting panel is optional on arrangement 1P.



### Arrangement 4

Direct drive arrangement where the impeller is mounted to the motor shaft. The design is more compact and requires less maintenance due to not having fan shaft, bearings or belts. High airstream temperatures may limit the use of this arrangement.




### Arrangement 4P

Same as the arrangement 4 fan except the fan is mounted to grade. Typically used where the customer's wall may not be sufficient by itself. Mounting to the foundation also makes it better for meeting lower vibration requirements. Mounting panel is optional.



**Arrangement 8P**


Direct drive arrangement where the motor shaft is coupled to the fan shaft. The entire assembly is mounted to grade. Typically used on larger fans and/or larger HP motors where the customer's wall may not be sufficient by itself. Mounting to the foundation also makes it better for meeting lower vibration requirements. Mounting panel is optional.

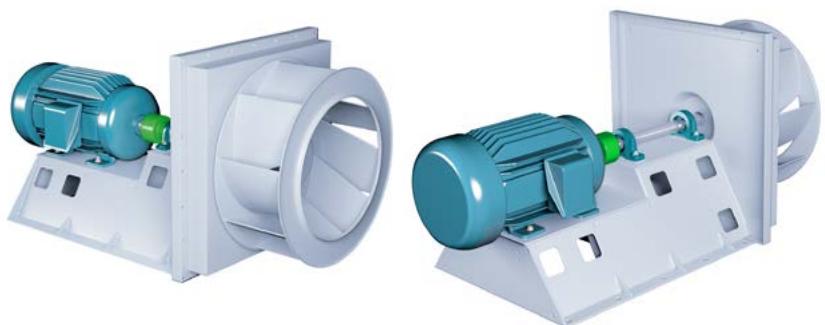**Arrangement 9**


Arrangement 9 is the most common plug fan arrangement. It is fully supported by the customer's wall. Plug fans are housed in the customer's enclosure in applications where the system plenum acts as the fan housing. Unlike the plenum fan, motor, shaft and bearings are outside of the process airstream.

**Arrangement 9P**

Same as the arrangement 9 fan except the fan is mounted to grade. Typically used on larger fans and/or larger HP motors where the customer's wall may not be sufficient by itself. Mounting to the foundation also makes it better for meeting lower vibration requirements. Mounting panel is optional.

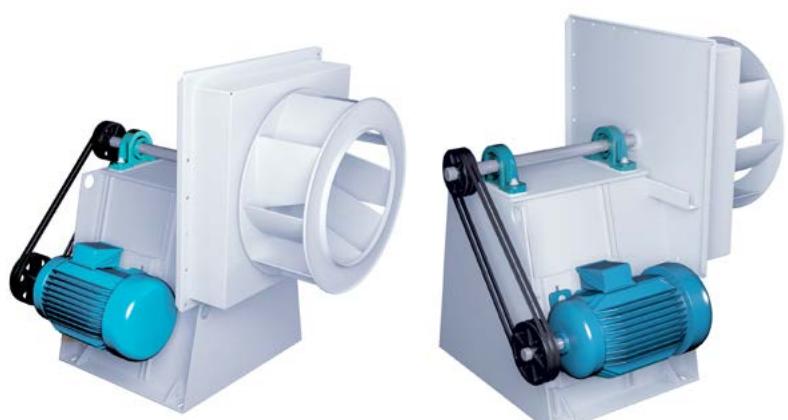

## OPTIONS/ACCESSORIES

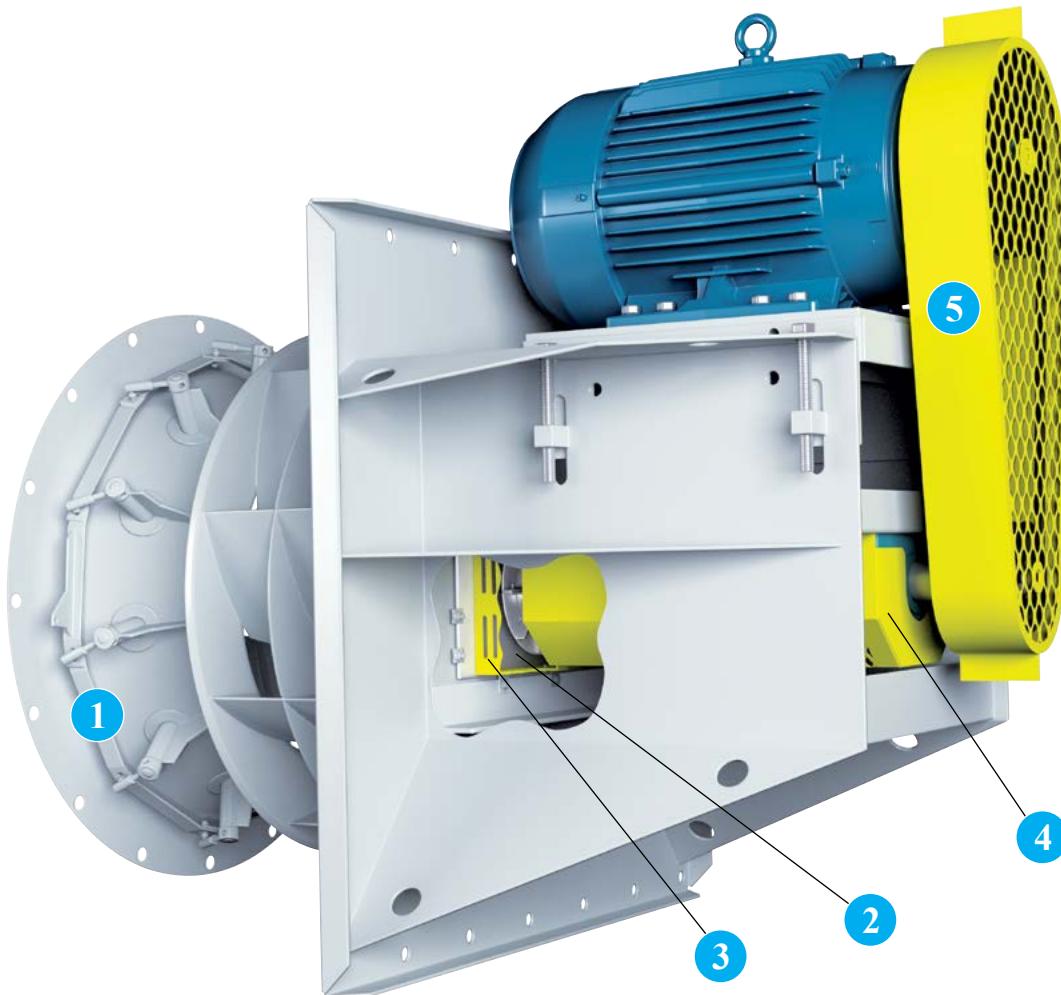

**1 Inlet Vanes** For reduced flow situations with relatively clean air, inlet vane type dampers are available to maintain fan efficiency. The inlet vanes are external type attached to the inlet of the fan. Standard construction inlet vanes are suitable in applications up to 300°F. High temperature inlet vanes are also available for temperatures up to 600°F.

**2 Shaft Coolers** Cast aluminum shaft cooler dissipates the heat transferred to the shaft from the airstream protecting the fan bearings. Recommended for applications over 300°F.

**3 Shaft Seals** reduce leakage and protect the bearings from a contaminated airstream. Standard seals are constructed of Tetrglas compressed between an aluminum cover plate and the fan housing. The standard shaft seal is not gas tight. Special seals are available for low leakage applications requiring more protection.

**4 Shaft and Bearing Guards** Sheet metal guards cover shaft and bearings and come with extended lube lines to a common point outside of the guard. A guard spanning the shaft between the bearings is available to provide open access to bearings for lubrication and vibration monitoring.

**5 Belt Guards** Belt guard protects personnel from the moving drive parts. OSHA and quick access guards are available.

### Other Accessories Include:

- Piezometer Ring
- Inlet Screens
- Special Impeller Widths

## MOUNTING CONFIGURATIONS

Mounting is accomplished by providing a hole larger than the impeller diameter through the chamber wall. The impeller, shaft, motor and drive assembly is then positioned to the inlet cone (mounted in opposite wall) and secured in place. See Figure A.

Another method is to provide a hole sized only for the impeller drive shaft. The impeller is then positioned through the opening for the inlet cone after the drive and panel assembly has been securely mounted. See Figure B.

Plug fans may be applied with open impeller (unhoused) or with a housing as shown in Figure C. Performance data in this catalog is for unhoused impeller application.

Walls must be designed by the users to support the dynamic loads of the fan without resonance to eliminate vibration and bearing failure.

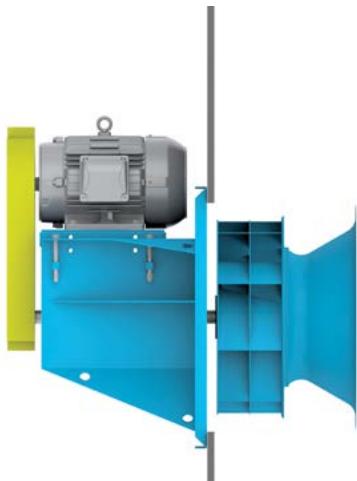


Figure A

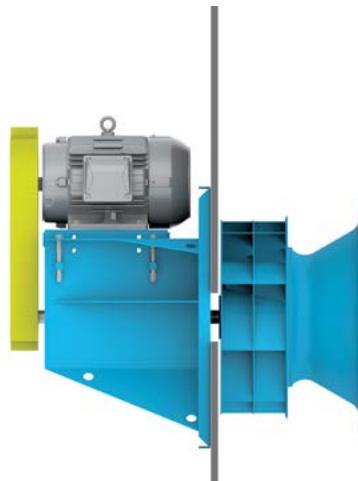


Figure B



Figure C  
(shown with optional housing)

## MOUNTING ARRANGEMENTS



Horizontal



Vertical Down



Vertical Up

# ENGINEERING DATA

To ensure proper motor selection, consideration must be given to starting torque requirements (fan impeller inertia  $WR^2$ ) along with the operating BHP. Table 1 lists the  $WR^2$  factors for different impeller sizes to be used in evaluating

the capability of a selected motor. In some cases it may be necessary to provide a larger horsepower motor, even though it may not be dictated by the operating BHP, to bring the fan to speed.

*Table 1. Maximum Fan RPMs, Impeller Weights and  $WR^2$*

FAN SIZE	CLASS II				CLASS III				IMPELLER WT. (LBS.)	$WR^2$ (LBS-FT <sup>2</sup> )		
	MAXIMUM RPM			IMPELLER WT. (LBS.)	$WR^2$ (LBS-FT <sup>2</sup> )	MAXIMUM RPM						
	NO PLUG	4" PLUG	6" PLUG			NO PLUG	4" PLUG	6" PLUG				
122	3777	3777	3000	21	3	-	-	-	-	-		
150	3352	3352	2875	24	4	-	-	-	-	-		
165	2975	2975	2425	32	7	-	-	-	-	-		
182	2566	2566	2566	37	12	3453	3453	3230	46	12		
200	2341	2341	2341	42	17	3151	3151	2965	52	17		
222	2105	2105	1905	67	28	2833	2833	2833	78	29		
245	1911	1911	1765	79	42	2572	2572	2435	98	49		
270	1734	1734	1734	105	64	2334	2334	2334	111	70		
300	1561	1561	1561	119	93	2101	2101	2101	139	116		
330	1419	1419	1419	136	134	1910	1910	1910	165	155		
365	1283	1283	1283	175	226	1727	1727	1550	211	264		
402	1163	1163	1163	204	330	1566	1566	1566	245	385		
445	1052	1052	1052	334	542	1416	1416	1416	367	621		
490	956	956	956	377	772	1286	1286	1286	458	1015		

*Table 2. Bare Fan and Accessory Weights*

FAN SIZE	CLASS III				INLET VANES	
	BARE FAN		INSULATED PLUG	HOUSING		
	CLASS II	CLASS III				
122	140	-	25	24	45	
150	145	-	25	30	52	
165	185	-	32	44	58	
182	230	428	32	65	29	
200	233	452	32	79	33	
222	247	507	35	97	38	
245	252	581	35	117	40	
270	341	711	40	143	45	
300	348	756	40	236	45	
330	376	960	55	287	50	
365	438	1093	55	350	50	
402	586	1427	75	428	55	
445	652	1630	75	522	60	
490	962	1745	95	634	65	



*Table 3. High Temperature Applications*

TEMP. RANGE	BEARING TYPE	LUBRICATION	OTHER REQUIREMENTS
TO 300°F	BALL OR ROLLER	GREASE	STANDARD CONSTRUCTION
301 TO 500°F	EXPANSION AND NON-EXPANSION	HIGH TEMPERATURE GREASE	CERAMIC SHAFT SEAL, SHAFT COOLER
501 TO 800°F	EXPANSION AND NON-EXPANSION	HIGH TEMPERATURE GREASE	HIGH TEMPERATURE ALUMINUM PAINT 4" MINIMUM INSULATION REQUIRED BY TCF OR CUSTOMER CERAMIC SHAFT SEAL, SHAFT COOLER
801 TO 1000°F	EXPANSION AND NON-EXPANSION	HIGH TEMPERATURE GREASE	316 STAINLESS STEEL IMPELLER AND SHAFT 6" MINIMUM INSULATION REQUIRED BY TCF OR CUSTOMER HIGH TEMPERATURE ALUMINUM PAINT CERAMIC SHAFT SEAL, SHAFT COOLER

Figure 1. Impeller and Plenum Arrangement

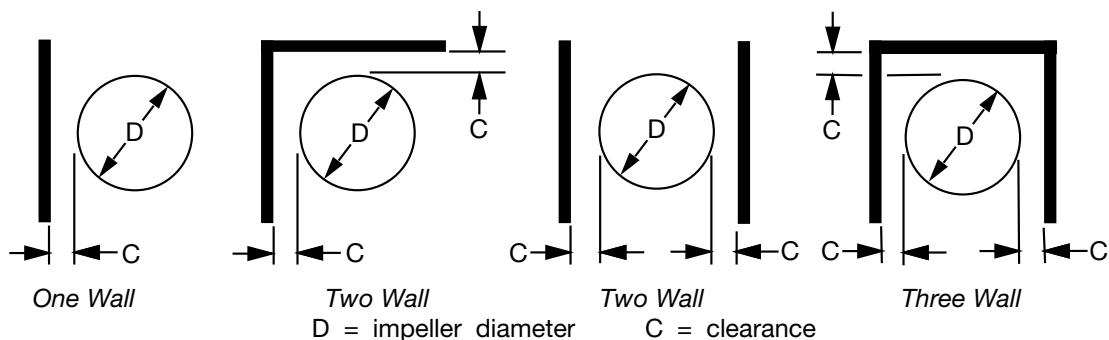


Table 4. Wall Proximity Factors

% WOV	FACTOR	C = D/8			C = D/4			C = D/2		
		ONE WALL	TWO WALL	THREE WALL	ONE WALL	TWO WALL	THREE WALL	ONE WALL	TWO WALL	THREE WALL
95	RPM	1.02	1.03	1.09	1.01	1.02	1.06	1.01	1.01	1.03
	BHP	1.06	1.08	1.29	1.04	1.06	1.20	1.02	1.02	1.08
85	RPM	1.02	1.02	1.08	1.01	1.02	1.06	1.01	1.01	1.03
	BHP	1.05	1.07	1.26	1.03	1.05	1.18	1.02	1.02	1.08
75	RPM	1.01	1.02	1.07	1.01	1.02	1.05	1.00	1.01	1.02
	BHP	1.04	1.06	1.23	1.03	1.05	1.16	1.01	1.02	1.07
65	RPM	1.01	1.02	1.06	1.01	1.01	1.04	1.00	1.01	1.02
	BHP	1.04	1.06	1.19	1.03	1.04	1.14	1.01	1.02	1.06
55	RPM	1.01	1.02	1.05	1.01	1.01	1.04	1.00	1.01	1.02
	BHP	1.03	1.05	1.16	1.02	1.03	1.12	1.01	1.02	1.05
45	RPM	1.01	1.01	1.04	1.01	1.01	1.03	1.00	1.00	1.01
	BHP	1.02	1.04	1.13	1.02	1.03	1.09	1.01	1.01	1.04

Table 5. WOV Factors

SIZE	WOV FACTOR	D
122	1.04	12.40
150	1.92	13.98
165	2.55	15.75
182	3.65	18.25
200	4.81	20.00
222	6.81	22.25
245	9.09	24.50
270	12.63	27.00
300	17.32	30.00
330	23.05	33.00
365	30.62	36.50
402	41.06	40.25
445	55.49	44.50
490	74.09	49.00

Table 6. Temperature and Altitude Correction Factors

AIR TEMP °F	ALTITUDE IN FEET ABOVE SEA LEVEL											
	BAROMETRIC PRESSURE IN INCHES OF MERCURY											
	29.92	28.86	27.82	26.82	25.84	24.90	23.98	23.09	22.22	21.39	20.58	16.89
70	1.000	0.964	0.930	0.896	0.864	0.832	0.801	0.772	0.743	0.714	0.688	0.564
100	0.946	0.912	0.880	0.848	0.818	0.787	0.758	0.730	0.703	0.676	0.651	0.534
150	0.869	0.838	0.808	0.770	0.751	0.723	0.696	0.671	0.646	0.620	0.598	0.490
200	0.803	0.774	0.747	0.720	0.694	0.668	0.643	0.620	0.596	0.573	0.552	0.453
250	0.747	0.720	0.694	0.669	0.645	0.622	0.598	0.576	0.555	0.533	0.514	0.421
300	0.697	0.672	0.648	0.624	0.604	0.580	0.558	0.538	0.518	0.498	0.480	0.393
400	0.616	0.594	0.573	0.552	0.532	0.513	0.493	0.476	0.458	0.440	0.424	0.347
500	0.552	0.532	0.513	0.495	0.477	0.459	0.442	0.426	0.410	0.394	0.380	0.311
600	0.500	0.482	0.465	0.448	0.432	0.416	0.400	0.386	0.372	0.352	0.344	0.282
700	0.457	0.441	0.425	0.410	0.395	0.380	0.366	0.353	0.340	0.326	0.315	0.258
800	0.420	0.404	0.389	0.375	0.362	0.350	0.336	0.323	0.311	0.300	0.290	0.237
900	0.389	0.376	0.363	0.349	0.336	0.324	0.312	0.300	0.289	0.279	0.268	0.220
1000	0.363	0.350	0.338	0.325	0.314	0.302	0.291	0.280	0.270	0.259	0.250	0.205

Table 7. Derate Values

TEMP. (°F)	STEEL	304/316 SS
70	1.00	1.00
200	0.97	0.95
300	0.94	0.92
400	0.92	0.88
500	0.92	0.84
600	0.91	0.81
700	0.89	0.78
800	0.86	0.75
900	NA	0.73
1000	NA	0.70

NOTE: For aluminum construction, consult factory for maximum speeds.



The performance tables in this catalog are based on fans handling standard air at a density of 0.075 pounds per cubic foot. This is equivalent to air at 70°F at sea level (29.92 Hg barometric pressure). When specified performance is at a density different than standard, it must be converted to the equivalent standard conditions before the fan can be selected from the performance tables. The performance data and examples in this catalog are for unhooded BEPL plug fans.

## Example 1. Standard Density

**Given:** 17000 CFM at 3" TSP (system). Installation is a two-wall arrangement with a impeller-to-wall clearance of 6.75".

Step 1. Entering the performance tables we find that a 270 BEPL plug fan will deliver 17000 CFM at 3" SP operating at 1652 RPM with 12.21 BHP.

Step 2. Catalog performance must be corrected for impeller-to-wall arrangement. Determine the impeller and plenum type from the arrangements shown in Figure 1 on page 11. Determine the clearance "C" based upon the closest wall. Performance will not be affected by any additional walls spaced greater than C x 3 from the impeller.

The selected 270 BEPL fan has a impeller diameter of 27.0" ("D"). Application is two walls with 6.75" clearance ("C"). Therefore,  $C \div D = 6.75 \div 27.0 = 0.25$  or  $\frac{1}{4}$ " which is equivalent to  $D \div 4$ .

Step 3. Next, determine the Percent of Wide Open Volume (% WOV) at which the fan is to operate. From Table 5 on page 11 find that the WOV factor is 12.63 for a 270 BEPL fan.

$$\% \text{ WOV} = \frac{17000 \times 100}{1652 \times 12.63} = 81.5$$

Step 4. By interpolation from Table 4 on page 11, for the two wall column of  $D \div 4$  at 81.5% WOV, we find the RPM factor of 1.02 and the BHP factor of 1.05.

Corrected unhooded performance for 17000 CFM at 3" SP standard air is:

$$\begin{aligned} \text{RPM} &= 1652 \times 1.02 = 1685 \\ \text{BHP} &= 12.21 \times 1.05 = 12.82 \end{aligned}$$

## Example 2. Nonstandard Density

**Given:** 17000 CFM at 3" TSP (system), 300°F, 4000 ft. altitude. Installation is a two-wall arrangement with a impeller-to-wall clearance of 6.75".

Step 1. To enter the performance tables the operating SP must be corrected to equivalent standard conditions. From Table 6 on page 11 find the correction factor of 0.604 for 300°F and 4000 feet altitude. The corrected equivalent static pressure is equal to:

$$\text{SP (Catalog)} = \frac{3" \text{ TSP (system)}}{0.604} = 5.0$$

Fan selection is then made for 17000 CFM at 5" SP. Entering the performance tables, we find that a 270 BEPL fan will deliver 17000 CFM at 1805 RPM with 17.75 BHP. It must be remembered that this BHP is catalogued at standard 70°F air at sea level.

Steps 2, 3 and 4. Continue the correction procedure with Steps 2, 3 and 4 as shown in Example 1. Wall arrangement =  $D \div 4$ , % WOV = 74.6, RPM = 1841 and BHP = 18.64.

## PERFORMANCE COMPARISON

Model BEPL Plug Fans are designed to maximize efficiency. This is illustrated by the following charts, which compare the new BEPL Plug Fan and other manufacturers' airfoil (AF) and backward inclined (BI) fans.

CFM	SP	MANUFACTURER	RPM	BHP
23000	3.5"	Twin City BEPL	1015	15.43
		Manufacturer "A" AF	1107	16.60
		Manufacturer "A" BI	1005	17.50
		Manufacturer "B" AF	971	17.94
37000	5"	Twin City BEPL	1442	38.50
		Manufacturer "A" AF	1593	43.70
		Manufacturer "A" BI	1425	46.10
		Manufacturer "B" AF	1400	50.00

Nominal 36" Impeller Diameter

CFM	SP	MANUFACTURER	RPM	BHP
30000	2.5"	Twin City BEPL	716	14.40
		Manufacturer "A" AF	783	15.60
		Manufacturer "A" BI	713	16.50
		Manufacturer "B" AF	725	17.46
50000	5"	Twin City BEPL	1111	49.90
		Manufacturer "A" AF	1226	55.94
		Manufacturer "A" BI	1103	58.85
		Manufacturer "B" AF	1117	68.90

Nominal 44" Impeller Diameter

**122 BEPL**

Impeller Dia.: 12.40"

Max. BHP = 0.059 x (RPM ÷ 1000)<sup>3</sup>

CFM	0.5" SP		1" SP		1.5" SP		2" SP		2.5" SP		3" SP		3.5" SP		4" SP		4.5" SP		5" SP		5.5" SP		6" SP	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP																
700	1155	0.09																						
800	1201	0.10	1563	0.23																				
900	1261	0.11	1602	0.24																				
1000	1327	0.13	1637	0.26	1923	0.42																		
1200	1473	0.17	1738	0.30	1996	0.47	2239	0.66																
1400	1627	0.22	1868	0.35	2087	0.52	2309	0.72	2525	0.95	2713	1.18												
1600	1784	0.29	2010	0.43	2211	0.60	2401	0.79	2595	1.02	2789	1.28	2966	1.54	3126	1.81								
1800	1945	0.38	2161	0.53	2346	0.70	2522	0.89	2691	1.11	2862	1.36	3037	1.64	3205	1.94	3358	2.24	3500	2.54				
2000	2109	0.48	2316	0.64	2492	0.82	2655	1.02	2812	1.24	2964	1.48	3116	1.75	3273	2.05	3430	2.37	3578	2.70	3716	3.03		
2200	2276	0.60	2473	0.78	2643	0.97	2796	1.17	2944	1.39	3086	1.64	3224	1.90	3362	2.19	3503	2.50	3647	2.84				
2400	2444	0.74	2633	0.93	2798	1.14	2945	1.35	3083	1.57	3218	1.82	3348	2.08	3476	2.37	3602	2.68	3729	3.00				
2600	2615	0.91	2795	1.12	2954	1.33	3098	1.55	3230	1.78	3356	2.03	3481	2.30	3602	2.59	3720	2.89						
2800	2787	1.09	2959	1.32	3113	1.55	3253	1.78	3382	2.03	3502	2.28	3619	2.55	3735	2.84								
3000	2960	1.31	3125	1.55	3273	1.79	3410	2.04	3536	2.30	3653	2.56	3765	2.84										
3200	3134	1.55	3293	1.81	3436	2.07	3568	2.33	3692	2.60														
3400	3310	1.83	3462	2.11	3600	2.38	3728	2.65																
3600	3486	2.13	3632	2.43	3766	2.72																		
3800	3663	2.47																						
4000																								

Maximum RPM @ 70°F:

Class II — 3777

Must derate for temperature and plug wall thickness.

**150 BEPL**

Impeller Dia.: 13.98"

Max. BHP = 0.108 x (RPM ÷ 1000)<sup>3</sup>

CFM	0.5" SP		1" SP		1.5" SP		2" SP		2.5" SP		3" SP		3.5" SP		4" SP		4.5" SP		5" SP		5.5" SP		6" SP		
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP																	
900	1027	0.12																							
1000	1058	0.12	1381	0.28																					
1200	1144	0.15	1434	0.32																					
1400	1241	0.19	1492	0.35	1740	0.57	1950	0.80																	
1600	1346	0.23	1574	0.40	1790	0.61	2005	0.87	2190	1.13															
1800	1454	0.29	1666	0.46	1860	0.67	2054	0.92	2245	1.22	2413	1.51													
2000	1564	0.36	1765	0.53	1946	0.75	2117	0.99	2293	1.28	2466	1.61	2622	1.94	2763	2.27									
2200	1675	0.44	1870	0.63	2039	0.84	2198	1.09	2354	1.37	2514	1.69	2673	2.05	2820	2.41	2953	2.77	3079	3.14					
2400	1789	0.53	1977	0.73	2137	0.95	2288	1.20	2432	1.48	2575	1.79	2722	2.14	2869	2.53	3008	2.93	3136	3.32	3256	3.72			
2600	1904	0.64	2086	0.85	2240	1.08	2383	1.33	2520	1.62	2652	1.93	2784	2.27	2919	2.64	3056	3.05	3188	3.48	3312	3.91			
2800	2021	0.76	2196	0.99	2347	1.23	2482	1.49	2613	1.77	2739	2.08	2861	2.42	2983	2.78	3108	3.18	3235	3.61					
3000	2138	0.90	2307	1.15	2455	1.40	2586	1.66	2709	1.95	2831	2.26	2947	2.60	3062	2.97	3175	3.35	3291	3.77					
3200	2257	1.06	2420	1.32	2563	1.58	2692	1.86	2811	2.15	2926	2.47	3039	2.81	3148	3.17	3255	3.56							
3400	2376	1.24	2534	1.51	2673	1.79	2800	2.08	2915	2.38	3025	2.70	3133	3.04	3239	3.40	3341	3.79							
3600	2617	1.65	2764	1.96	2896	2.26	3017	2.58	3129	2.90	3233	3.24	3333	3.59											
4000	2861	2.15	2999	2.49	3123	2.83	3239	3.17	3347	3.52															
4600	3107	2.75	3236	3.13																					
5000																									
5400																									

Maximum RPM @ 70°F:

Class II — 3352

Must derate for temperature and plug wall thickness.

**165 BEPL**

Impeller Dia.: 15.75"

Max. BHP = 0.196 x (RPM ÷ 1000)<sup>3</sup>

CFM	0.5" SP		1" SP		1.5" SP		2" SP		2.5" SP		3" SP		3.5" SP		4" SP		4.5" SP		5" SP		5.5" SP		6" SP			
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP														
1200	923	0.15																								
1400	977	0.17	1252	0.38																						
1600	1041	0.20	1286	0.41	1511	0.67																				
1800	1110	0.24	1330	0.45	1549	0.72	1735	1.02																		
2000	1183	0.29	1387	0.49	1583	0.77	1775	1.09	1937	1.42																
2200	1258	0.34	1451	0.55	1628	0.82	1808	1.15	1977	1.51	2124	1.87														
2400	1335	0.41	1518	0.62	1684	0.89	1846	1.21	2012	1.58	2164	1.98	2299	2.38												
2600	1412	0.48	1589	0.70	1747	0.97	1896	1.29	2047	1.65	2199	2.07	2339	2.50	2465	2.93										
2800	1490	0.56	1663	0.80	1812	1.07	1953	1.																		

## PERFORMANCE DATA

### 182 BEPL

Impeller Dia.: 18.25"

Max. BHP = 0.444 x (RPM ÷ 1000)<sup>3</sup>

CFM	1" SP		2" SP		3" SP		4" SP		5" SP		6" SP		7" SP		8" SP		9" SP		10" SP		11" SP		12" SP	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2000	1047	0.49																						
2500	1078	0.56	1468	1.28																				
3000	<u>1153</u>	<u>0.65</u>	1485	1.42																				
3500	1258	0.79	1521	1.56	1814	2.55	2075	3.61																
4000	1371	0.96	1588	1.73	1836	2.74	2093	3.90	2323	5.11														
4500	1485	1.15	1683	1.98	1888	2.97	2111	4.15	2341	5.48	2549	6.83												
5000	1602	1.37	1791	2.27	1962	3.25	2157	4.45	2359	5.79	2566	7.25	2759	8.76	2936	10.27								
5500	1722	1.63	1903	2.60	2058	3.62	2221	4.78	2402	6.15	2585	7.62	2775	9.23	2956	10.88	3122	12.54						
6000	1845	1.92	2016	2.96	2166	4.05	2307	5.21	2462	6.55	2629	8.06	2796	9.66	2970	11.40	3140	13.18	3299	14.99	3448	16.79		
6500	1969	2.25	2132	3.37	2278	4.54	2408	5.73	<u>2541</u>	<u>7.05</u>	2687	8.53	2841	10.17	2996	11.91	3154	13.73	3314	15.66				
7000	2094	2.62	2249	3.82	2390	5.05	2517	6.33	2637	7.66	2763	9.11	2899	10.72	3043	12.49	3186	14.34	3332	16.28				
7500	2221	3.04	2369	4.31	2504	5.62	2629	6.97	2742	8.35	2854	9.79	2974	11.38	3102	13.13	3235	15.00	3370	16.98				
8000	2348	3.50	2490	4.86	2620	6.24	2741	7.66	2853	9.12	2958	10.61	3063	12.17	<u>3176</u>	<u>13.87</u>	3296	15.73	3421	17.72				
8500	2477	4.02	2612	5.45	2737	6.91	2855	8.40	2965	9.94	3066	11.48	3165	13.09	<u>3265</u>	<u>14.77</u>	<u>3371</u>	<u>16.58</u>						
9000	2606	4.59	2736	6.10	2857	7.64	2970	9.20	3077	10.80	3178	12.44	3272	14.09	<u>3365</u>	<u>15.80</u>								
9500	2736	5.22	2861	6.81	2977	8.42	3087	10.07	3191	11.74	3290	13.45	3383	15.18										
10000	2867	5.91	2987	7.58	3099	9.28	3205	10.99	3306	12.73	3403	14.51												
10500	2998	6.66	3113	8.41	3222	10.19	3324	11.97	3422	13.79														
11000	3130	7.49	3241	9.32	3345	11.16	3445	13.04																

Maximum RPM @ 70°F:

Class II — 2566

Class III — 3453

Must derate for temperature and plug wall thickness.

### 200 BEPL

Impeller Dia.: 20.00"

Max. BHP = 0.701 x (RPM ÷ 1000)<sup>3</sup>

CFM	1" SP		2" SP		3" SP		4" SP		5" SP		6" SP		7" SP		8" SP		9" SP		10" SP		11" SP		12" SP	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2500	957	0.60																						
3000	984	0.67	1339	1.54																				
3500	<u>1038</u>	<u>0.76</u>	1353	1.69																				
4000	1114	0.89	1373	1.81	1650	2.98																		
4500	1199	1.05	1415	1.97	1662	3.18	1902	4.52																
5000	1284	1.22	1475	2.17	1689	3.38	1914	4.79	2126	6.30														
5500	1372	1.42	1551	2.43	1732	3.61	1932	5.04	2138	6.64	2329	8.29												
6000	1461	1.65	1633	2.72	1790	3.90	1968	5.34	2152	6.95	2342	8.71	2518	10.52	2679	12.32								
6500	1552	1.90	1719	3.05	1862	4.26	2015	5.66	2184	7.31	2355	9.08	2530	10.99	2694	12.94	<u>2845</u>	<u>14.90</u>						
7000	1645	2.18	1804	3.40	1942	4.68	2076	6.07	2226	7.69	2383	9.49	2542	11.41	2705	13.47	2861	15.59	<u>3004</u>	<u>17.69</u>	<u>3140</u>	<u>19.80</u>		
7500	1738	2.49	1891	3.79	2026	5.14	2149	6.56	2280	8.14	2423	9.95	2570	11.90	2719	13.97	2871	16.17	<u>3018</u>	<u>18.41</u>				
8000	1833	2.84	1979	4.21	2111	5.64	2229	7.11	2345	8.68	2472	10.45	2608	12.42	2746	14.52	2885	16.71	3028	19.04				
8500	1929	3.23	2069	4.67	2197	6.17	2312	7.71	2420	9.31	2533	11.05	2655	12.99	2784	15.11	2914	17.35	3044	19.66				
9000	2025	3.65	2160	5.17	2284	6.74	2397	8.36	2501	10.01	2604	11.76	2713	13.66	2830	15.76	2952	18.02	<u>3074</u>	<u>20.37</u>				
10000	2219	4.61	2345	6.30	2460	8.00	2569	9.78	2670	11.59	2763	13.41	2855	15.32	2950	17.35	<u>3051</u>	<u>19.54</u>						
11000	2416	5.75	2533	7.60	2641	9.46	2744	11.37	2841	13.33	2932	15.31	3018	17.33	3101	19.39								
12000	2614	7.08	2723	9.09	2826	11.12	2923	13.18	3015	15.27	3103	17.40												
13000	2814	8.64	2916	10.80	3013	12.99	3105	15.21																
14000	3015	10.42	3111	12.74																				

Maximum RPM @ 70°F:

Class II — 2341

Class III — 3151

Must derate for temperature and plug wall thickness.

### 222 BEPL

Impeller Dia.: 22.25"

Max. BHP = 1.20 x (RPM ÷ 1000)<sup>3</sup>

CFM	1" SP		2" SP		3" SP		4" SP		5" SP		6" SP		7" SP		8" SP		9" SP		10" SP		11" SP		12" SP	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3000	842	0.71																						
3500	859	0.76																						
4000	<u>892</u>	<u>0.84</u>	1185	1.93																				
4500	<u>937</u>	<u>0.94</u>	1197	2.05																				
5000	990	1.06	1217	2.17	1454	3.59			1673	5.39														
5500	1048	1.20	1250	2.32	1465	3.76																		

245 BEPL

**Impeller Dia.: 24.50"**

$$\text{Max. BHP} = 1.95 \times (\text{RPM} \div 1000)^3$$

**Maximum RPM @ 70°F:**

Class II — 1911

Class III — 2572

**Must derate for temperature and plug wall thickness.**

270 BEPL

**Impeller Dia.: 27.00"**

$$\text{Max. BHP} = 3.34 \times (\text{RPM} \div 1000)^3$$

---

**Maximum RPM @ 70°F:**

Class II - 1734

Class III — 2334

**Must derate for temperature and plug wall thickness.**

300 BEPL

**Impeller Dia.: 30.00"**

$$\text{Max. BHP} = 5.66 \times (\text{RPM} \div 1000)^3$$

**Maximum RPM @ 70°F:**

Class II — 1561

Class III — 2101

**Must derate for temperature and plug wall thickness.**

Underlined figures indicate maximum static efficiency.

Power rating (BHP) does not include transmission losses.

## PERFORMANCE DATA

**330 BEPL**

**Impeller Dia.: 33.00"**

$$\text{Max. BHP} = 9.12 \times (\text{RPM} \div 1000)^3$$

---

**Maximum RPM @ 70°F:**

Class II - 1419

Class III - 1910

Must derate for temperature and plug wall thickness.

365 BEPL

**Impeller Dia : 36.50"**

$$\text{Max. BHP} = 15.50 \times (\text{RPM} \div 1000)^3$$

---

**Maximum RPM @ 70°F:**

Class II - 1283

Class III -1727

Must derate for temperature and plug wall thickness.

402 BEPL

**Impeller Dia.: 40.25"**

$$\text{Max. BHP} = 25.30 \times (\text{RPM} \div 1000)^3$$

CFM	1" SP		2" SP		3" SP		4" SP		5" SP		6" SP		7" SP		8" SP		9" SP		10" SP		11" SP		12" SP		
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP																	
12000	454	2.36	616	5.49																					
14000	478	2.68	620	5.92																					
16000	509	3.09	632	6.38	757	10.56																			
18000	544	3.58	653	6.98	763	11.15	873	16.04																	
20000	582	4.14	679	7.66	778	11.91	878	16.86	976	22.36															
22000	623	4.80	709	8.46	799	12.79	889	17.75	980	23.35	1069	29.43	1153	35.66											
24000	665	5.56	743	9.38	825	13.82	907	18.84	990	24.46	1074	30.71	1155	37.25	1233	44.05									
26000	708	6.41	779	10.39	854	14.97	930	20.09	1006	25.74	1083	31.98	1160	38.72	1235	45.76	1308	53.11							
28000	751	7.34	818	11.55	886	16.25	956	21.45	1027	27.22	1098	33.48	1169	40.21	1241	47.50	1311	55.03	1379	62.82	1446	70.87			
30000	796	8.42	858	12.81	920	17.64	986	23.04	1052	28.89	1118	35.21	1184	41.97	1250	49.17	1317	56.91	1383	64.95	1448	73.33	1510	81.69	
32000	840	9.58	989	14.20	957	19.21	1017	24.68	1079	30.65	1141	37.07	1203	43.92	1265	51.19	1327	58.87	1390	67.08	1452	75.55	1513	84.29	
34000	886	10.92	942	15.77	996	20.95	1051	26.53	1109	32.63	1167	39.11	1225	46.02	1284	53.43	1342	61.12	1401	69.34	1460	77.94	1519	86.91	
36000	931	12.34	984	17.40	1036	22.82	1088	28.61	1141	34.77	1196	41.40	1251	48.42	1306	55.85	1361	63.64	1416	71.80	1471	80.33	1527	89.38	
38000	977	13.93	1028	19.25	1077	24.85	1125	30.74	1175	37.08	1227	43.88	1279	51.00	1331	58.50	1383	66.37	1435	74.59	1487	83.15	1540	92.24	
40000	1023	15.65	1071	21.17	1119	27.06	1165	33.17	1211	39.58	1259	46.43	1309	53.77	1358	61.31	1408	69.37	1457	77.62	1507	86.36	1556	95.26	
42000	1070	17.57	1116	23.34	1161	29.35	1205	35.70	1249	42.32	1294	49.31	1340	56.64	1387	64.36	1434	72.40	1482	80.96	1529	89.69			
44000	1116	19.60	1160	25.59	1204	31.92	1246	38.43	1288	45.24	1330	52.32	1374	59.87	1418	67.65	1463	75.83	1508	84.33	1553	93.18			
46000	1163	21.84	1205	28.05	1247	34.59	1288	41.37	1328	48.36	1368	55.62	1409	63.24	1451	71.20	1494	79.55	1537	88.16					
48000	1210	24.26	1251	30.75	1291	37.49	1330	44.44	1368	51.58	1407	59.11	1446	66.90	1485	74.89	1526	83.39							

**Maximum RPM @ 70°F:**

Class II — 1163

Class III — 1566

**Must derate for temperature and plug wall thickness.**

Underlined figures indicate maximum static efficiency.

Power rating (BHP) does not include transmission losses.

**445 BEPL**

Impeller Dia.: 44.50"

Max. BHP = 41.80 x (RPM ÷ 1000)<sup>3</sup>

CFM	1" SP		2" SP		3" SP		4" SP		5" SP		6" SP		7" SP		8" SP		9" SP		10" SP		11" SP		12" SP		
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP																	
14000	406	2.80																							
16000	422	3.10	559	7.03																					
18000	442	3.45	564	7.44	683	12.38																			
20000	466	3.89	575	7.94	685	13.02																			
22000	492	4.37	591	8.55	690	13.62	789	19.56																	
24000	520	4.92	610	9.23	701	14.39	793	20.43	882	27.05															
26000	550	5.57	631	9.97	715	15.21	800	21.30	885	28.14	966	35.37													
28000	581	6.29	655	10.84	733	16.20	811	22.28	890	29.16	968	36.62	1043	44.46											
30000	612	7.06	681	11.80	753	17.26	826	23.45	899	30.31	973	37.92	1046	46.08	1115	54.38									
32000	644	7.93	708	12.83	775	18.44	843	24.69	912	31.67	980	39.18	1050	47.52	1118	56.22	1183	65.11	1247	74.34					
34000	676	8.87	737	14.00	798	19.67	863	26.11	927	33.10	992	40.78	1056	48.92	1122	57.89	1186	67.15	1247	76.52	1308	86.37			
36000	709	9.93	766	15.22	824	21.12	884	27.60	945	34.73	1006	42.45	1067	50.72	1128	59.53	1189	68.86	1250	78.74	1309	88.85	1366	99.04	
38000	742	11.07	796	16.56	850	22.57	907	29.25	964	36.40	1022	44.23	1080	52.59	1137	61.33	1196	70.91	1254	80.81	1311	91.04	1367	101.61	
40000	775	12.29	827	18.02	878	24.21	931	30.99	986	38.37	1040	46.16	1095	54.59	1150	63.52	1205	72.97	1260	82.89	1316	93.48	1370	104.15	
44000	842	15.08	890	21.27	937	27.89	984	34.97	1032	42.50	1082	50.64	1131	59.11	1181	68.22	1231	77.78	1281	87.81	1331	98.30	1381	109.21	
48000	910	18.34	955	25.04	998	32.05	1040	39.39	1084	47.33	1128	55.59	1174	64.48	1219	73.63	1265	83.42	1310	93.43	1356	104.06	1402	115.11	
52000	979	22.13	1020	29.24	1060	36.67	1100	44.53	1139	52.65	1179	61.23	1220	70.24	1262	79.74	1304	89.61	1346	99.90	1388	110.60			
56000	1048	26.44	1086	33.99	1124	41.93	1161	50.16	1198	58.77	1234	67.58	1271	76.83	1310	86.70	1348	96.66	1388	107.38					
60000	1118	31.38	1153	39.36	1189	47.80	1224	56.49	1258	65.41	1292	74.66	1326	84.21	1361	94.23	1397	104.70							

Maximum RPM @ 70°F:

Class II — 1052

Class III — 1416

Must derate for temperature and plug wall thickness.

**490 BEPL**

Impeller Dia.: 49.00"




Max. BHP = 67.60 x (RPM ÷ 1000)<sup>3</sup>

CFM	1" SP		2" SP		3" SP		4" SP		5" SP		6" SP		7" SP		8" SP		9" SP		10" SP		11" SP		12" SP	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP												
16000	364	3.25																						
18000	374	3.53	506	8.19																				
20000	387	3.84	508	8.62																				
22000	403	4.22	513	9.08	620	15.05																		
24000	420	4.63	521	9.56	622	15.72																		
26000	440	5.13	532	10.13	625	16.31	716	23.42																
28000	461	5.67	545	10.75	632	17.04	718	24.27	801	32.23														
32000	505	6.91	577	12.27	653	18.72	728	26.02	804	34.31	878	43.27												
36000	551	8.39	614	14.08	681	20.72	748	28.22	815	36.53	883	45.77	949	55.50	1013	65.70								
40000	599	10.16	656	16.26	714	23.08	774	30.73	835	39.28	895	48.43	956	58.45	1017	69.19	1075	80.07	1132	91.41				
44000	648	12.22	700	18.72	751	25.78	806	33.78	860	42.31	915	51.67	970	61.70	1025	72.40	1081	83.94	1136	95.93	1189	108.13	1240	120.38
48000	697	14.55	746	21.54	792	28.93	841	37.14	891	45.98	941	55.47	991	65.58	1042	76.50	1092	87.83	1143	99.97	1194	112.71	1244	125.80
52000	748	17.31	793	24.71	836	32.54	880	41.01	925	50.05	971	59.71	1018	70.19	1064	81.04	1111	92.69	1157	104.66	1204	117.46	1251	130.79
56000	799	20.42	840	28.18	881	36.50	921	45.23	962	54.55	1005	64.60	1048	75.14	1091	86.25	1134	97.92	1177	110.09	1220	122.79	1263	136.01
60000	850	23.89	889	32.17	927	40.85	965	50.07	1002	59.58	1041	69.82	1081	80.63	1121	91.90	1161	103.70	1202	116.31	1242	129.13	1282	142.42
64000	901	27.77	938	36.52	974	45.67	1010	55.32	1045	65.28	1080	75.63	1117	86.72	1154	98.18	1192	110.31	1230	122.96	1267	135.81		
68000	953	32.16	988	41.40	1022	50.99	1056	61.05	1089	71.40	1122	82.16	1156	93.50	1190	105.14	1226	117.65	1261	130.28				
72000	1005	37.02	1038	46.71	1071	56.86	1103	67.31	1134	78.02	1165	89.12	1197	100.83	1229	112.88	1261	125.19						
76000	1057	42.37	1089	52.63	1120	63.18	1150	73.98	1180	85.19	1210	96.83	1239	108.59	1269	120.95								

Underlined figures indicate maximum static efficiency.

Power rating (BHP) does not include transmission losses.



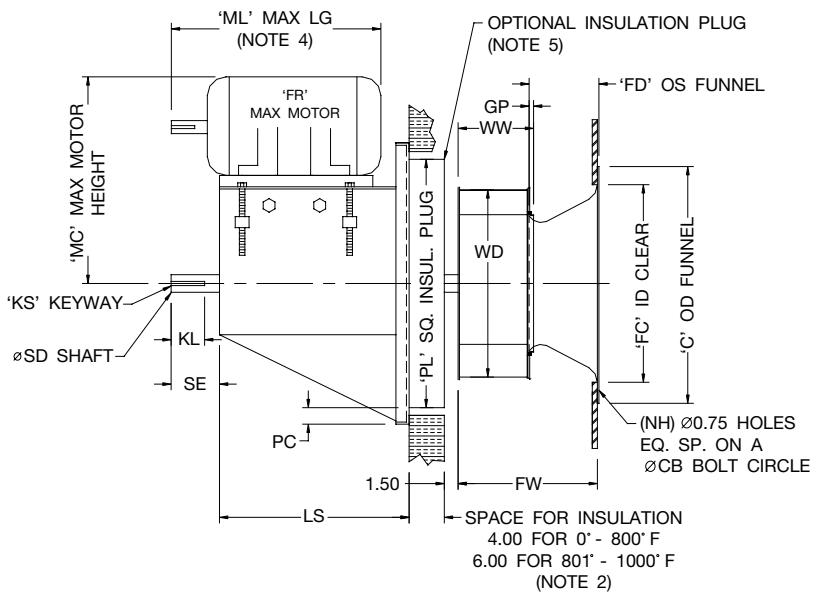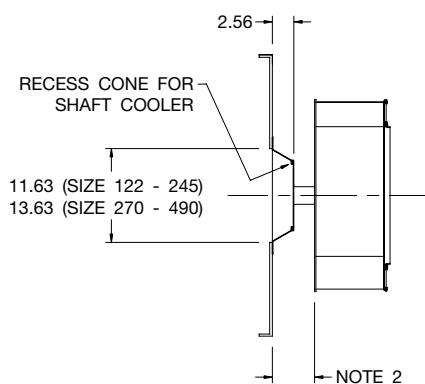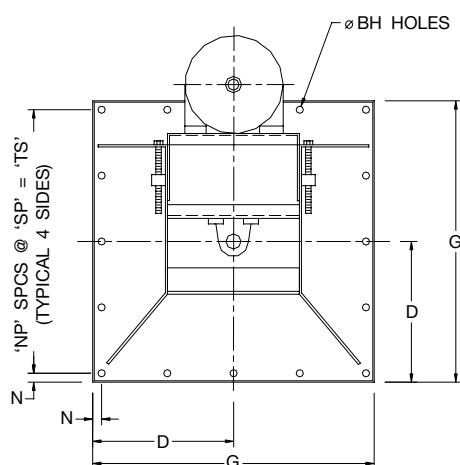

## NOTES:

1. Dimensions apply to unhooded assembly only.
2. When specified, the shaft length can be extended an additional 2 inches for 6 inches of insulation, for operation to 800°F, without changes to the shaft diameter. See Detail 'A' for shaft cooler recess cone and shaft seal on fans over 300°F with 4" or larger insulation plug or wall thickness.
3. CW rotation is standard. CCW rotation is optional.
4. To ensure selected motor will fit standard assembly, compare the maximum motor length, dimension "ML," to overall motor length.
5. Dimensions are subject to change based on accessories. See page 20 for accessory options.
6. Customer to provide wall opening with adequate clearance for installation of impeller and insulation plug when provided.
7. Dimensions shown are in inches unless otherwise indicated.

DETAIL 'A'


SIZE	BH	C	CB	D	FC	FD	FR	FW	G	GP	KL	KS	LS
122	0.56	15.75	15.88	11.38	13.25	3.72	213T	8.54	22.75	0.25	4.00	.38x.19	17.50
150	0.56	18.25	17.63	11.38	16.19	4.19	215T	9.61	22.75	0.25	4.00	.38x.19	18.50
165	0.56	20.00	19.59	14.81	17.75	4.72	215T	10.81	29.63	0.25	4.00	.38x.19	18.50
182	0.56	22.00	21.00	14.81	19.50	6.44	254T	12.75	29.63	0.38	4.50	.50x.25	21.00
200	0.56	24.38	23.38	14.81	21.38	7.05	254T	14.01	29.63	0.41	4.50	.50x.25	21.00
222	0.56	26.63	25.50	16.00	23.75	7.83	256T	15.53	32.00	0.45	4.50	.50x.25	22.50
245	0.56	29.00	27.75	16.00	27.00	8.62	256T	17.08	32.00	0.50	4.50	.50x.25	22.50
270	0.69	31.00	29.75	18.31	29.00	9.45	284T	18.77	36.63	0.55	5.00	.50x.25	23.00
300	0.69	34.88	33.63	18.31	31.62	10.50	284T	20.80	36.63	0.61	5.00	.50x.25	23.00
330	0.69	38.50	37.25	21.81	34.75	11.57	286T	22.92	43.63	0.67	5.00	.50x.25	24.50
365	0.69	42.00	40.75	21.81	39.50	12.84	286T	25.44	43.63	0.75	5.50	.50x.25	24.50
402	0.69	45.38	44.13	27.50	42.50	14.28	326T	28.20	55.00	0.82	5.50	.50x.25	27.50
445	0.69	49.88	48.63	27.50	47.25	15.81	326T	31.18	55.00	0.91	5.50	.63x.31	27.50
490	0.69	54.38	53.13	28.50	52.00	17.38	326T	34.27	57.00	1.00	5.50	.63x.31	27.50

SIZE	MC	ML	N	NH	NP	PC	PL	SD	SE	SP	TS	WD	WW
122	24.25	19.13	1.00	8.00	4.00	1.75	19.25	1.687	5.00	5.19	20.75	12.40	5.07
150	24.25	20.13	1.00	8.00	4.00	1.75	19.25	1.687	5.00	5.19	20.75	13.98	5.67
165	24.25	20.13	1.00	8.00	4.00	1.81	26.00	1.687	5.00	6.91	27.63	15.75	6.34
182	27.50	24.13	1.00	8.00	4.00	1.81	26.00	1.937	5.50	6.91	27.63	18.25	6.74
200	27.50	24.13	1.00	8.00	4.00	1.81	26.00	1.937	5.50	6.91	27.63	20.00	7.43
222	27.50	25.50	1.00	8.00	4.00	1.88	28.25	1.937	5.50	7.50	30.00	22.25	8.21
245	27.50	25.50	1.00	8.00	4.00	1.88	28.25	1.937	5.50	7.50	30.00	24.50	9.04
270	29.50	26.63	1.00	8.00	6.00	2.25	32.13	2.187	6.00	5.77	34.63	27.00	9.94
300	29.50	26.63	1.00	16.00	6.00	2.25	32.13	2.187	6.00	5.77	34.63	30.00	10.99
330	29.50	28.13	1.00	16.00	6.00	2.38	38.88	2.187	6.00	6.94	41.63	33.00	12.11
365	29.50	28.13	1.00	16.00	6.00	2.38	38.88	2.187	6.50	6.94	41.63	36.50	13.44
402	33.00	31.25	1.00	16.00	6.00	3.38	48.25	2.187	6.50	8.83	53.00	40.25	14.83
445	33.00	31.25	1.00	16.00	6.00	3.38	48.25	2.437	6.50	8.83	53.00	44.50	16.37
490	33.00	31.25	1.00	16.00	6.00	2.50	52.00	2.437	6.50	9.17	55.00	49.00	17.98

AC1001435C

Dimensions are not to be used for construction. Certified drawings are available upon request.

## Class III

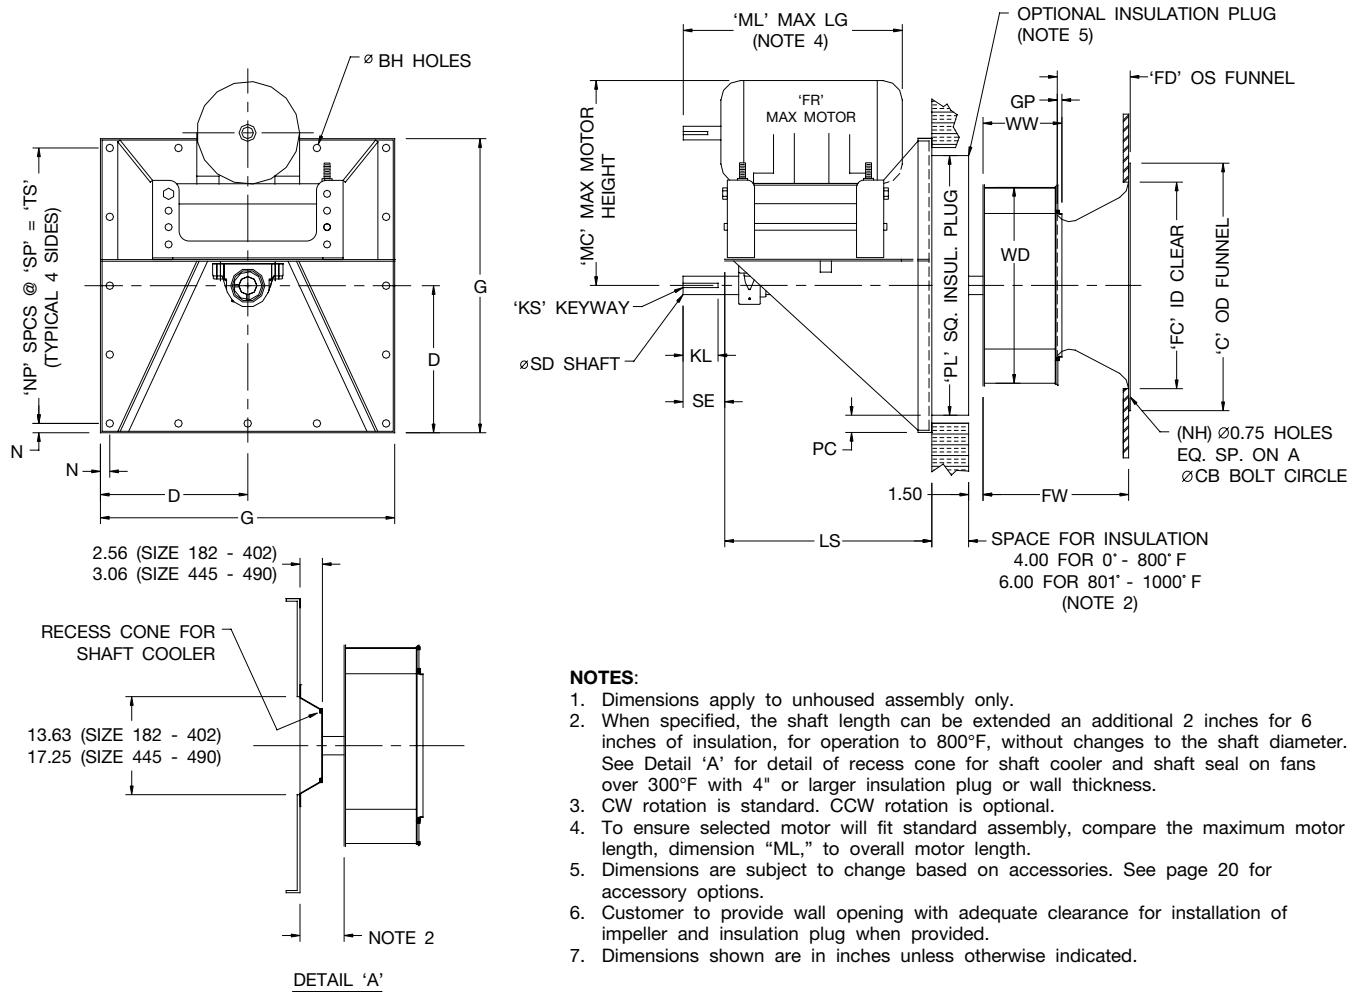


SIZE	BH	C	CB	D	FC	FD	FR	FW	G	GP	KL	KS	LS
182	0.56	22.00	21.00	14.81	19.50	6.44	256T	12.75	29.63	0.38	4.50	.63x.31	25.00
200	0.56	24.38	23.38	14.81	21.38	7.05	284T	14.01	29.63	0.41	5.50	.63x.31	27.50
222	0.56	26.63	25.50	16.00	23.75	7.83	286T	15.53	32.00	0.45	5.50	.63x.31	27.50
245	0.56	29.00	27.75	16.00	26.00	8.62	324T	17.16	32.00	0.50	6.00	.63x.31	30.50
270	0.69	31.00	29.75	18.31	28.50	9.45	326T	18.85	36.63	0.55	6.00	.63x.31	30.63
300	0.69	34.88	33.63	18.31	31.63	10.50	326T	20.87	36.63	0.61	6.00	.63x.31	30.63
330	0.69	38.50	37.25	21.81	34.75	11.57	365T	22.99	43.63	0.67	6.50	.63x.31	32.38
365	0.69	42.00	40.75	21.81	39.00	12.84	405T	25.50	43.63	0.75	8.00	.63x.31	37.88
402	0.69	45.38	44.13	27.50	42.50	14.28	405T	28.26	55.00	0.82	8.00	.75x.38	38.38
445	0.69	49.88	48.63	27.50	47.25	15.81	405T	31.24	55.00	0.91	8.00	.88x.44	38.38
490	0.69	54.38	53.13	28.50	52.00	17.38	405T	34.33	57.00	1.00	8.00	.88x.44	38.38

SIZE	MC	ML	N	NH	NP	PC	PL	SD	SE	SP	TS	WD	WW
182	26.50	25.75	1.00	8.00	4.00	1.81	26.00	2.437	4.50	6.91	27.63	18.25	6.74
200	28.00	28.88	1.00	8.00	4.00	1.81	26.00	2.437	5.50	6.91	27.63	20.00	7.43
222	28.00	28.88	1.00	8.00	4.00	1.88	28.25	2.687	5.50	7.50	30.00	22.25	8.21
245	32.00	32.00	1.00	8.00	4.00	1.88	28.25	2.687	6.00	7.50	30.00	24.50	9.11
270	32.00	32.00	1.00	8.00	6.00	2.25	32.13	2.687	6.00	5.77	34.63	27.00	10.02
300	32.00	32.00	1.00	16.00	6.00	2.25	32.13	2.687	6.00	5.77	34.63	30.00	11.06
330	34.00	34.38	1.00	16.00	6.00	2.38	38.88	2.687	6.50	6.94	41.63	33.00	12.18
365	38.00	41.25	1.00	16.00	6.00	2.38	38.88	2.687	8.00	6.94	41.63	36.50	13.50
402	38.00	41.25	1.00	16.00	6.00	3.38	48.25	2.937	8.00	8.83	53.00	40.25	14.89
445	38.00	41.25	1.00	16.00	6.00	2.50	52.00	3.437	8.00	9.17	55.00	49.00	18.04
490	38.00	41.25	1.00	16.00	6.00								

AC1001436D

Dimensions are not to be used for construction. Certified drawings are available upon request.

## Accessories

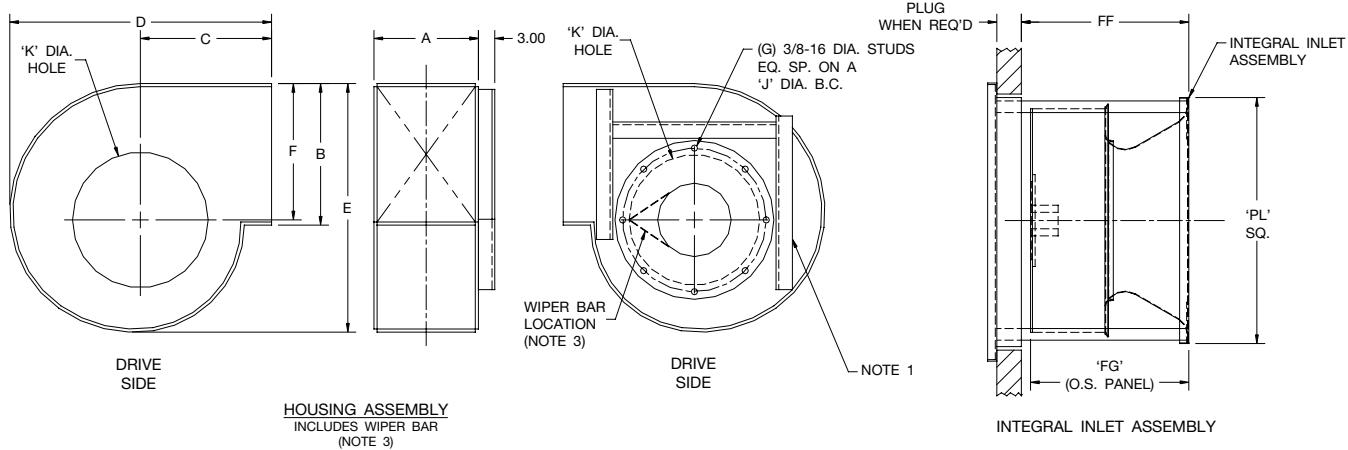

SIZE	A		B		C	D		E		F		G	J	K	PL	FF	FG	
	CL 2	CL 3	CL 2	CL 3		CL 2	CL 3	CL 2	CL 3	CL 2	CL 3						CL 2	CL 3
122	10.00	10.00	13.81	13.81	12.56	25.13	25.13	23.69	23.69	13.19	13.19	8	15.88	14.13	19.25	10.13	8.63	—
150	11.00	11.00	15.63	15.63	13.69	27.88	27.88	26.69	26.69	14.88	14.88	8	17.63	15.94	19.25	11.19	9.69	—
165	12.19	12.19	17.56	17.56	14.81	30.81	30.81	30.00	30.00	16.75	16.75	8	19.59	17.88	26.00	12.38	10.88	—
182	14.31	14.31	19.38	19.50	14.00	29.69	29.75	33.13	33.25	19.31	19.38	8	21.00	19.50	26.00	14.50	13.00	13.00
200	15.63	15.63	21.19	21.31	15.31	32.63	32.69	36.31	36.44	21.13	21.19	8	23.38	21.38	26.00	15.75	14.25	14.25
222	17.13	17.13	23.56	23.69	17.19	36.25	36.31	40.31	40.44	23.50	23.56	8	25.50	23.75	28.25	17.31	15.81	15.81
245	18.75	18.81	25.94	26.19	19.00	40.00	40.13	44.38	44.63	25.88	26.00	8	27.75	27.00	28.25	18.88	17.38	17.44
270	20.44	20.56	28.63	28.88	20.94	44.13	44.25	49.00	49.25	28.56	28.69	16	29.75	29.00	32.13	20.69	19.19	19.25
300	22.50	22.63	31.81	32.00	23.31	49.06	49.13	54.44	54.63	31.75	31.81	16	33.63	31.63	32.13	22.69	21.19	21.31
330	24.63	24.75	35.13	35.31	25.75	54.13	54.19	60.00	60.19	35.06	35.13	16	37.25	34.75	38.88	24.88	23.38	23.44
365	27.13	27.25	38.69	38.88	28.50	60.00	60.06	66.31	66.50	38.63	38.69	16	40.75	39.50	38.88	27.38	25.88	25.94
402	29.81	29.94	42.63	42.81	31.50	66.19	66.25	73.06	73.25	42.56	42.63	16	44.13	42.50	48.25	30.06	28.56	28.63
445	32.81	32.88	47.13	47.31	34.88	73.13	73.19	80.75	80.94	47.06	47.13	16	48.63	47.25	48.25	33.06	31.63	31.63
490	35.88	36.00	51.94	52.13	38.50	80.69	80.75	89.00	89.19	51.88	51.94	16	53.13	52.00	50.00	36.13	34.69	34.69

AC1001437C

Dimensions are not to be used for construction. Certified drawings are available upon request.

**TCF**  
TWIN CITY FAN

## Belt Centers

MOTOR FRAME SIZE	CLASS II								CLASS III											
	122-165		182-245		270-365		402-490		182		200-222		245-270		300		365-402		445-490	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
56	13	16.5	14	17.5	14.5	18	16	19.5	9.4	13.4	9.4	13.4	9.3	13.3	9.3	13.3	9.3	13.3	9.8	13.8
143-145	13	16.5	14	17.5	14.5	18	16	19.5	9.4	13.4	9.4	13.4	9.3	13.3	9.3	13.3	9.3	13.3	9.8	13.8
182-184	14	17.5	15	18.5	15.5	19	17	20.5	10.4	14.4	10.4	14.4	10.3	14.3	10.3	14.3	10.3	14.3	10.8	14.8
213-215	14.8	18.3	15.8	19.3	16.3	19.8	17.8	21.3	11.2	15.2	11.2	15.2	11	15	11.1	15.1	11.1	15.1	11.6	15.6
254-256	—	—	16.8	20.3	17.3	20.8	18.8	22.3	14.8	18.8	14.8	18.8	14.6	18.6	14.7	18.7	14.7	18.7	15.2	19.2
284-286	—	—	—	—	18	21.5	19.5	23	—	—	15.6	19.6	15.4	19.4	15.4	19.4	15.4	19.4	15.9	19.9
324-326	—	—	—	—	—	—	20.5	24	—	—	—	—	17.6	22.6	17.6	22.6	17.6	22.6	18.1	23.1
364-365	—	—	—	—	—	—	—	—	—	—	—	—	—	—	18.6	23.6	18.6	23.6	19.1	24.1
404-405	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	20.8	25.8	21.3	26.3



Model BEPL in Paint Booth

**TCF**  
TWIN CITY FAN

# TYPICAL SPECIFICATIONS



## Model

BEPL

Fans shall be Model BEPL Single Thickness Airfoil, as manufactured by Twin City Fan & Blower, Minneapolis, Minnesota.

**PERFORMANCE** — Fans shall be tested and rated in accordance with industry accepted test codes and shall be guaranteed by the manufacturer to deliver rated published performance levels.

**PLUG PANEL** — Plug panel shall be of minimum 7 gauge steel with formed flanges to maintain flatness and rigidity. Panel shall be prepunched for bolt mounting. The "Cross Frame" bearing support shall be designed for maximum stability and load spreading. Bearings shall be serviceable without disassembly of panel or frame. Plug assembly is available for both horizontal and vertical application. Horizontal construction is standard. Vertical construction must be specified.

**IMPELLER** — BEPL impellers shall be backward curved, non-overloading, single thickness airfoil type, designed for maximum efficiency and quiet operation. Impellers shall be constructed of heavy-gauge steel, welded to a flat impeller cone and backplate.

**SHAFT** — Shafts shall be AISI 1040 or 1045 hot rolled steel accurately turned, ground, polished and ring gauged for accuracy. Shafts shall be sized for a first critical speed of at least 1.43 times the maximum speed for the class.

**BEARINGS** — Bearings shall be either ball or spherical roller, heavy-duty, self-aligning, pillow block type. Bearing selection is based upon L-10 minimum life of 40,000 hours or L-50 minimum life of 200,000 hours.

**OPTIONAL ALL WELDED HOUSING** — Housing shall be of heavy-gauge steel. Housing shall be provided with impeller opening on each side and weld studs on inlet side for cone mounting. Specify rotation and discharge as viewed from drive side to ensure proper stud placement. Housing supports and attachments for wall mounting to be provided by others.

**ADJUSTABLE MOTOR BASE** — Adjustable motor base is standard and shall have a four point leveling and tension adjustment to ensure proper drive belt alignment. The motor base shall be heavy-gauge steel and prepunched to accept standard motor frame specified.

**OPTIONAL INLET VANES** — Inlet vane blades are cantilever design or with centered supports equipped with permanently lubricated needle bearings and ball joints for smooth and easy operation. Vane assemblies are external type for sizes 122 through 165 and nested for sizes 182 through 490. Standard inlet vanes are applicable to 300°F. Consult factory for higher temperatures.

**FACTORY RUN TEST** — All fans prior to shipment shall be completely assembled and test run as a unit at the specified operating speed or maximum RPM allowed for the particular construction type. Each impeller shall be statically and dynamically balanced in accordance with ANSI/AMCA 204-96 "Balance Quality and Vibration Levels for Fans" to Fan Application Category BV-3, Balance Quality Grade G6.3. Balance readings shall be taken by electronic type equipment in the axial, vertical and horizontal directions on each of the bearings. Records shall be maintained and a written copy shall be available upon request.

**GUARANTEE** — The manufacturer shall guarantee the workmanship and materials for its BEPL Single Blade Airfoil Plug Fans for at least one (1) year from startup or eighteen (18) months from shipment, whichever occurs first. Fans shall be Model BEPL Single Thickness Airfoil, as manufactured by Twin City Fan & Blower, Minneapolis, Minnesota.

**Model****BFPL (High Efficiency Plug Fans)****Sizes**

12" to 49" impeller diameters (305 mm to 1,245 mm)

**Performance**

Airflow to 76,000 CFM (129,100 m<sup>3</sup>/hour)


Static pressure to 12" w.g. (2,980 Pa)

**Features**

SWSI backward curved, non-overloading, single thickness airfoil type impellers



See Catalog 360 for more information

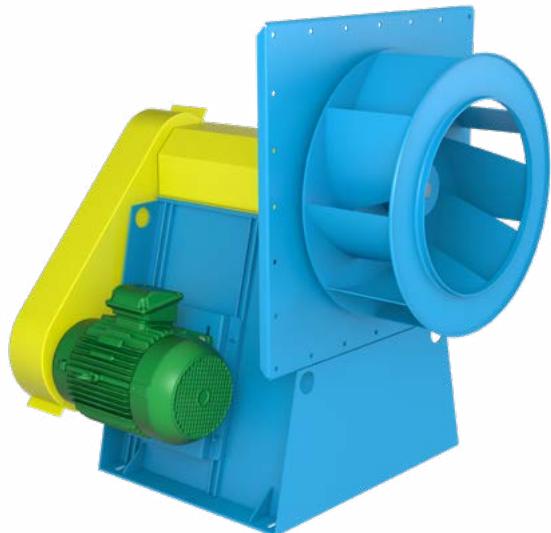

BFPL Arrangement 9P – Pedestal Plug Fan

**Model****BCPL (Plug Fans)****Sizes**

12.25" to 49" impeller diameters (311 mm to 1,245 mm)

**Performance**

Airflow to 57,900 CFM (98,400 m<sup>3</sup>/hour)

Static pressure to 8" w.g. (1,990 Pa)

**Features**

SWSI flat-blade backward inclined, non-overloading impellers



See Catalog 350 for more information



BCPL Shown with Optional Integral Inlet Cone Assembly

# **INDUSTRIAL PROCESS AND COMMERCIAL VENTILATION SYSTEMS**

CENTRIFUGAL FANS | UTILITY SETS | PLENUM & PLUG FANS | INLINE CENTRIFUGAL FANS

MIXED FLOW FANS | TUBEAXIAL & VANEAXIAL FANS | WALL MOUNTED FANS | ROOF VENTILATORS

CENTRIFUGAL ROOF & WALL EXHAUSTERS | CEILING VENTILATORS | GRAVITY VENTILATORS | DUCT BLOWERS

RADIAL BLADED FANS | RADIAL TIP FANS | HIGH EFFICIENCY INDUSTRIAL FANS | PRESSURE BLOWERS

LABORATORY EXHAUST FANS | FILTERED SUPPLY FANS | MANCOOLERS | FIBERGLASS FANS | CUSTOM FANS



**TWIN CITY FAN & BLOWER**  
**[WWW.TCF.COM](http://WWW.TCF.COM)**

5959 TRENTON LANE N | MINNEAPOLIS, MN 55442 | PHONE: 763-551-7600 | FAX: 763-551-7601

©2006-2020 Twin City Fan Companies, Ltd., Minneapolis, MN. All rights reserved. Catalog illustrations cover the general appearance of Twin City Fan & Blower products at the time of publication and we reserve the right to make changes in design and construction at any time without notice.